










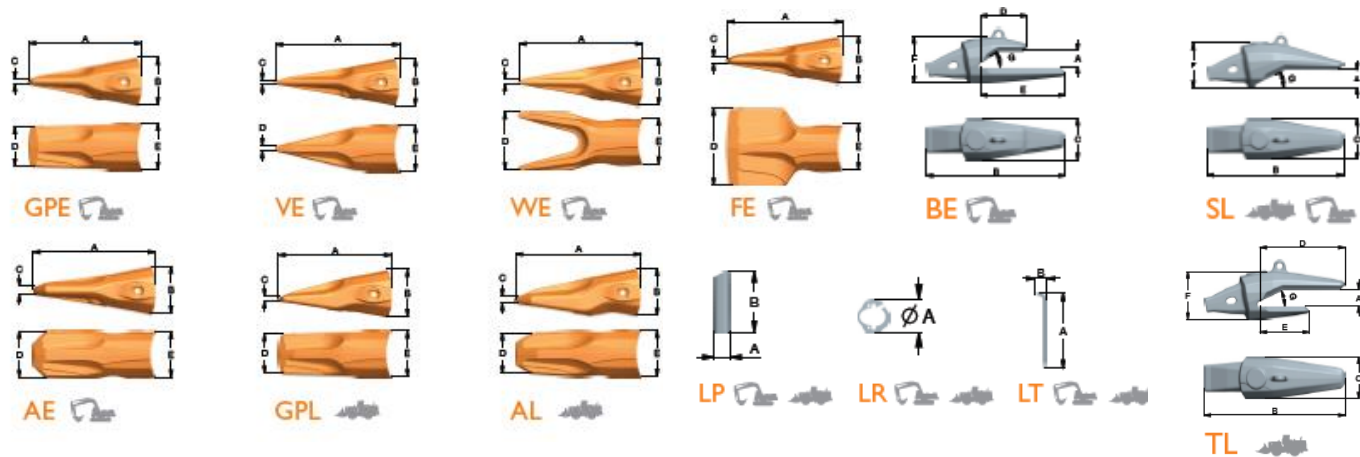















C-Rex System

















Grösse R10 Baggengewichtsklasse 12-14 MT, Max. Reisskraft in HD/XHD 88 kN
Ladergewichtsklasse 12-14 MT, Max. Reisskraft in HD/XHD 158 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Facette
R10	BE		5.5	27	281	83	95	171	90		30°
R10	SL	 	6.2	20(20-30)	278	83	N/A	N/A	88		25°
R10	GPE		3.2	208	86	10	72	84	-		-
R10	VE		2.7	228	86	8	10	84	-		-
R10	GPL		3.5	208	86	9	72	84	-		-
R10	LP	 	0.1	19	69	-	-	-	-		-
R10	LR	 	-	29	-	-	-	-	-		-
R10	LT	 	0.4	358	62	-	-	-	-		-



















Grösse R14 Baggergewichtsklasse 14-17 MT, Max. Reisskraft in HD/XHD 112 kN
Ladergewichtsklasse 14-17 MT, Max. Reisskraft in HD/XHD 202 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R14	BE		8.7	32	325	96	110	198	103	30°
R14	BE		8.7	42	325	96	110	198	103	30°
R14	SL		9.5	30(30-40)	322	96	N/A	N/A	101	25°
R14	LP		0.2	22	80	-	-	-	-	-
R14	LR		-	32	-	-	-	-	-	-
R14	LT		0.6	383	65	-	-	-	-	-
R14	GPE		4.7	240	100	11	83	97	-	-
R14	VE		4.3	265	100	9	10	97	-	-
R14	WE		5.1	265	100	9	123	97	-	-
R14	AE		6.2	262	100	18	98	97	-	-
R14	GPL		5.5	240	100	10	83	97	-	-
R14	AL		7.3	269	100	15	85	97	-	-



















Grösse R18 Baggergewichtsklasse 17-25 MT, Max. Reisskraft in HD/XHD 147 kN
Ladergewichtsklasse 17-25 MT, Max. Reisskraft in HD/XHD 265 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R18	BE		11.9	42	361	106	120	220	119	30°
R18	BE		12.1	47	362	106	119	221	119	30°
R18	SL		12.8	30(30-40)	357	106	N/A	N/A	114	25°
R18	TL		12.8	42	356	106	215	125	121	25°
R18	LP		0.2	25	90	-	-	-	-	-
R18	LR		-	35	-	-	-	-	-	-
R18	LT		0.6	408	65	-	-	-	-	-
R18	GPE		6.6	267	111	12	92	108	-	-
R18	VE		5.8	294	111	11	11	108	-	-
R18	WE		7.0	294	111	11	137	108	-	-
R18	FE		9.1	273	111	14	182	108	-	-
R18	AE		8.5	290	111	20	109	108	-	-
R18	GPL		7.5	267	111	11	92	108	-	-
R18	AL		10.0	298	111	17	94	108	-	-










Grösse R23 Baggergewichtsklasse 25-35 MT, Max. Reisskraft in HD/XHD 184 kN
Ladergewichtsklasse 25-35 MT, Max. Reisskraft in HD/XH 331 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R23	BE		17.5	42	408	120	137	249	130	30°
R23	BE		17.3	52	408	120	137	249	130	30°
R23	SL	 	18.3	40(40-50)	404	120	N/A	N/A	127	25°
R23	TL		18.3	42	403	120	244	140	130	25°
R23	LP	 	0.3	28	102	-	-	-	-	-
R23	LR	 	-	40	-	-	-	-	-	-
R23	LT	 	0.9	435	69	-	-	-	-	-
R23	GPE		9.6	301	125	14	104	122	-	-
R23	VE		8.4	332	125	12	13	122	-	-
R23	WE		10.1	332	125	12	155	122	-	-
R23	FE		13.1	309	125	16	205	122	-	-
R23	AE		12.4	328	125	22	123	122	-	-
R23	GPL		10.8	301	125	13	104	122	-	-
R23	AL		14.4	337	125	19	107	122	-	-

Grösse R29 Baggergewichtsklasse 35-45 MT, Max. Reisskraft in HD/XHD 233 kN
Ladergewichtsklasse 35-45 MT, Max. Reisskraft in HD/XHD 419 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R29	BE		23.7	52	449	132	150	274	148	30°
R29	BE		23.2	62	449	132	148	274	148	30°
R29	SL	 	21.0	50(50-65)	444	132	N/A	N/A	144	25°
R29	TL		24.6	52	443	132	268	156	150	25°
R29	LP	 	0.4	31	112	-	-	-	-	-
R29	LR	 	-	43	-	-	-	-	-	-
R29	LT	 	1.0	460	70	-	-	-	-	-
R29	GPE		12.6	331	138	15	115	134	-	-
R29	VE		11.4	365	138	13	14	134	-	-
R29	WE		13.5	365	138	13	170	134	-	-
R29	FE		17.4	340	138	18	226	134	-	-
R29	AE		16.2	361	138	24	136	134	-	-
R29	GPL		14.5	331	138	14	115	134	-	-
R29	AL		19.2	371	138	21	117	134	-	-

Grösse R35 Lader; Maschinengewicht 45-55 MT, Max. Reisskraft in HD/XHD 510 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R35	TL		30.6	67	501	149	303	174	170	30°
R35	GPL		20.9	375	156	16	130	151	-	-
R35	AL		27.8	419	156	23	133	151	-	-
R35	LP	 	0.6	34	127	-	-	-	-	-
R35	LR	 	-	49	-	-	-	-	-	-
R35	LT	 	1.1	485	75	-	-	-	-	-