










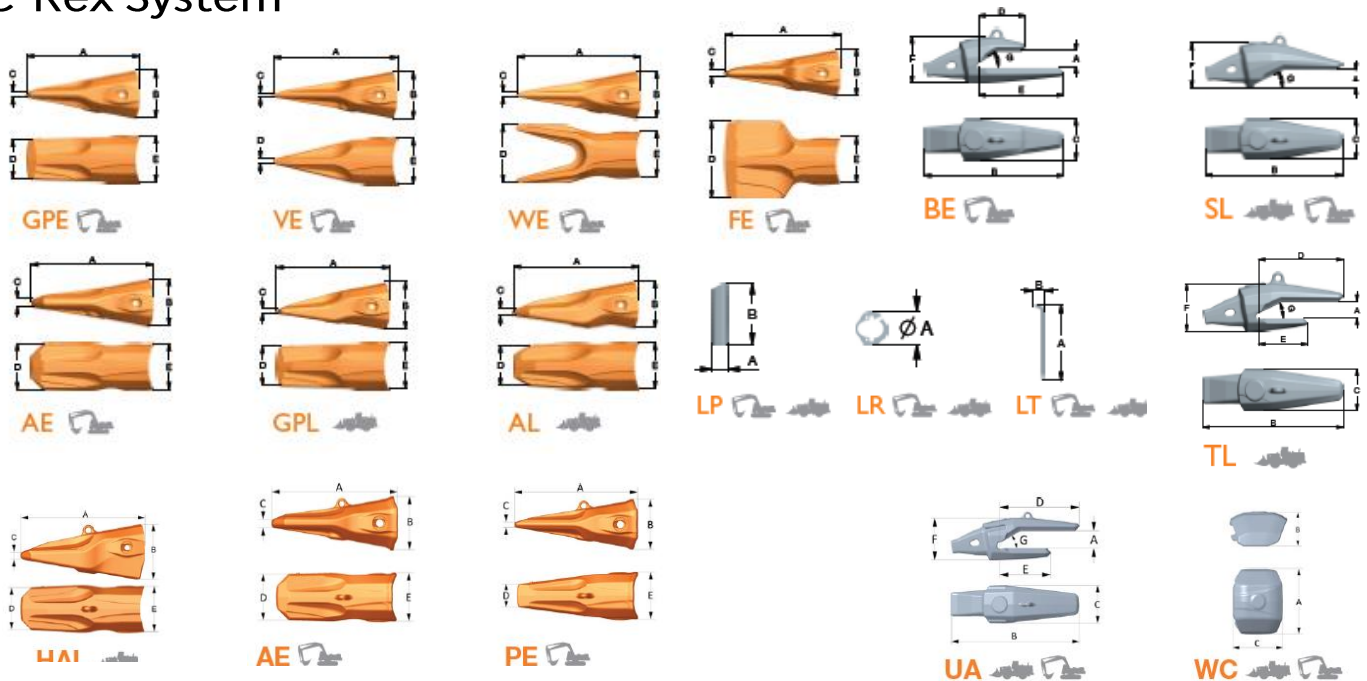
















C-Rex System





















Grösse R10 Baggergewichtsklasse 12-14 MT, Max. Reisskraft in HD/XHD 88 kN
Ladergewichtsklasse 12-14 MT, Max. Reisskraft in HD/XHD 158 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Facette
R10	BE25		5.5	27	281	83	95	171	90		30°
R10	SL20		6.2	20(20-30)	278	83	N/A	N/A	88		25°
R10	GPE		3.2	208	86	10	72	84	-		-
R10	VE		2.7	228	86	8	10	84	-		-
R10	GPL		3.5	208	86	9	72	84	-		-
R10	LP		0.1	19	69	-	-	-	-		-
R10	LR		-	29	-	-	-	-	-		-
R10	LT		0.4	358	62	-	-	-	-		-

Grösse R14 Baggergewichtsklasse 14-17 MT, Max. Reisskraft in HD/XHD 112 kN
Ladegewichtsklasse 14-17 MT, Max. Reisskraft in HD/XHD 202 kN



















Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R14	BE30		8.7	32	325	96	110	198	103	30°
R14	BE40		8.7	42	325	96	110	198	103	30°
R14	SL30	 	9.5	30(30-40)	322	96	N/A	N/A	101	25°
R14	LP	 	0.2	22	80	-	-	-	-	-
R14	LR	 	-	32	-	-	-	-	-	-
R14	LT	 	0.6	383	65	-	-	-	-	-
R14	GPE		4.7	240	100	11	83	97	-	-
R14	VE		4.3	265	100	9	10	97	-	-
R14	WE		5.1	265	100	9	123	97	-	-
R14	FE		6.4	240	100	13	156	97	-	-
R14	AE		6.2	262	100	18	98	97	-	-
R14	GPL		5.5	240	100	10	83	97	-	-
R14	AL		7.3	269	100	15	85	97	-	-

Grösse R18 Baggergewichtsklasse 17-25 MT, Max. Reisskraft in HD/XHD 147 kN
Ladegewichtsklasse 17-25 MT, Max. Reisskraft in HD/XHD 265 kN



















Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R18	BE40		11.9	42	361	106	120	220	119	30°
R18	BE45		12.1	47	362	106	119	221	119	30°
R18	SL30	 	12.8	30(30-40)	357	106	N/A	N/A	114	25°
R18	TL40		12.8	42	356	106	215	125	121	25°
R18	LP	 	0.2	25	90	-	-	-	-	-
R18	LR	 	-	35	-	-	-	-	-	-
R18	LT	 	0.6	408	65	-	-	-	-	-
R18	GPE		6.8	267	111	12	92	108	-	-
R18	VE		5.8	294	111	11	11	108	-	-
R18	WE		7.0	294	111	11	137	108	-	-
R18	FE		9.1	273	111	14	182	108	-	-
R18	AE		8.5	290	111	20	109	108	-	-
R18	GPL		7.6	267	111	11	92	108	-	-
R18	AL		10.0	298	111	17	94	108	-	-

3.1a

Grösse R23 Baggergewichtsklasse 25-35 MT, Max. Reisskraft in HD/XHD 184 kN
Ladergewichtsklasse 25-35 MT, Max. Reisskraft in HD/XH 331 kN















Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R23	BE40		17.5	42	408	120	137	249	130	30°
R23	BE50		17.3	52	408	120	137	249	130	30°
R23	SL40	 	18.3	40(40-50)	404	120	N/A	N/A	127	25°
R23	TL40		18.3	42	403	120	244	140	130	25°
R23	LP	 	0.3	28	102	-	-	-	-	-
R23	LR	 	-	40	-	-	-	-	-	-
R23	LT	 	0.9	435	69	-	-	-	-	-
R23	GPE		9.6	301	125	14	104	122	-	-
R23	VE		8.4	332	125	12	13	122	-	-
R23	WE		9.9	332	125	12	155	122	-	-
R23	FE		13.1	309	125	16	205	122	-	-
R23	AE		12.4	328	125	22	123	122	-	-
R23	GPL		10.8	301	125	13	104	122	-	-
R23	AL		14.4	337	125	19	107	122	-	-

Grösse R29 Baggergewichtsklasse 35-45 MT, Max. Reisskraft in HD/XHD 233 kN
Ladergewichtsklasse 35-45 MT, Max. Reisskraft in HD/XHD 419 kN










Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R29	BE50		23.7	52	449	132	150	274	148	30°
R29	BE60		23.2	62	449	132	148	274	148	30°
R29	SL50	 	21.0	50(50-65)	444	132	N/A	N/A	144	25°
R29	TL50		24.6	52	443	132	268	156	150	25°
R29	LP	 	0.4	31	112	-	-	-	-	-
R29	LR	 	-	43	-	-	-	-	-	-
R29	LT	 	1.0	460	70	-	-	-	-	-
R29	GPE		12.6	331	138	15	115	134	-	-
R29	VE		10.9	340	138	15	15	134	-	-
R29	WE		13.5	365	138	13	170	134	-	-
R29	FE		17.4	340	138	18	226	134	-	-
R29	AE		16.2	361	138	24	136	134	-	-
R29	GPL		14.5	331	138	14	115	134	-	-
R29	AL		19.2	371	138	21	117	134	-	-

3.1b













Grösse R35 Baggergewichtsklasse 40-50 MT, Max. Reisskraft in HD/XHD 296 kN
Lader; Maschinengewicht 45-55 MT, Max. Reisskraft in HD/XHD 510 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R35	TL65		30.6	67	501	149	303	174	170	30°
R35	UA60		32.9	62	500	149	306	198	163	30°
R35	UA65		32.5	67	500	149	304	198	163	30°
R35	UA70		32.4	72	500	149	301	192	163	30°
R35	WC		3.2	163	73	126	-	-	-	-
R35	GPE		18.7	374	156	18	130	151	-	-
R35	FE		25.1	385	156	21	255	151	-	-
R35	AE		23.8	407	156	27	153	151	-	-
R35	GPL		20.9	375	156	16	130	151	-	-
R35	AL		27.8	419	156	23	133	151	-	-
R35	HAL		36.3	419	186	27	157	151	-	-
R35	LP		0.6	34	127	-	-	-	-	-
R35	LR		-	49	-	-	-	-	-	-
R35	LT		1.1	485	75	-	-	-	-	-

Grösse R50 Baggergewichtsklasse 50-80 MT, Max. Reisskraft in HD/XHD 400 kN
Lader; Maschinengewicht 80-100 MT, Max. Reisskraft in HD/XHD 720 kN


Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R50	UA70		51.6	72	583	171	362	233	190	30°
R50	UA75		51.3	77	583	171	359	230	190	30°
R50	UA80		50.7	82	583	171	356	227	190	30°
R50	WC		3.9	184	82	142	-	-	-	-
R50	AE		33.4	448	186	32	171	178	-	-
R50	PE		28.4	454	186	20	87	178	-	-
R50	HAL		53.1	461	224	31	160	178	-	-
R50	LP		1.0	40	146	-	-	-	-	-
R50	LT		1.1	422	91	125	-	-	-	-









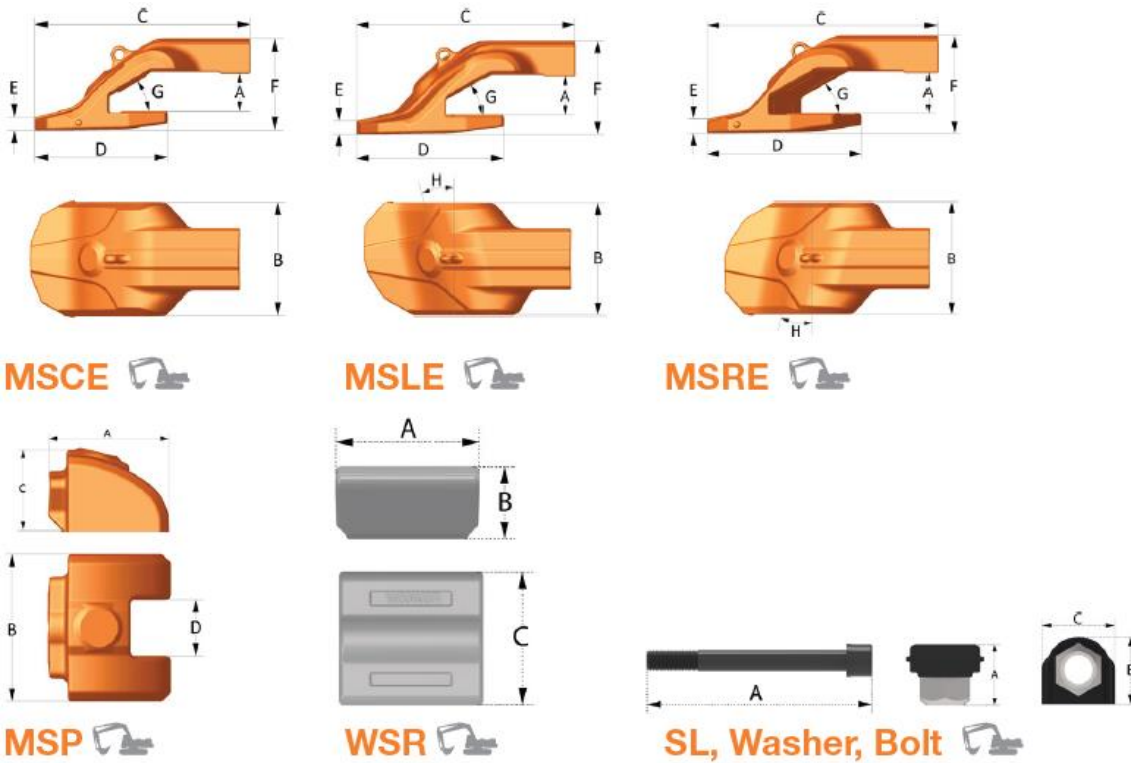


Grösse R70 Baggergewichtsklasse 80-120 MT, Max. Reisskraft in HD/XHD 576 kN
 Hochlöffel, Maschinengewicht 80-120 MT, Max. Reisskraft in HD/XHD 720 kN
 Lader; Maschinengewicht 100-150 MT, Max. Reisskraft in HD/XHD 1037 kN

Grösse	Typ	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G Facette
R70	UA75	 	91.3	77	707	199	409	263	215	30°
R70	UA90	 	90.3	92	707	199	409	263	224	30°
R70	WC	 	7.3	217	97	177	-	-	-	-
R70	AE		50.3	505	220	35	198	210	-	-
R70	PE		45.8	510	220	32	116	210	-	-
R70	LP	 	1.4	46	469	-	-	-	-	-
R70	LT	 	1.1	422	91	125	-	-	-	-


C-Rex System - SHROUDS

Mechanical Shrouds (70 mm, 75 mm)




Typ	Art.Nr.	passend zu	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G °	H °
MSCE70	500401		40.0	72	240	445	275	28	189	30	0
MSLE70	500402		39.0	72	240	445	275	29	189	30	15
MSRE70	500403		39.0	72	240	445	275	29	189	30	15
MSCE75	500404		40.0	77	240	425	275	17	189	30	0
MSLE75	500405		39.0	77	240	425	275	29	189	30	15
MSRE75	500406		39.0	77	240	425	275	29	189	30	15
MSP75	500423		4.2	108	130	72	49	-	-	-	-
WSR75	500417		2.2	95	53	90	-	-	-	-	-
SL	500302		0.3	48	54	58	-	-	-	-	-
Washer	500355		-	-	-	-	-	-	-	-	-
Bolt	500354		0.9	254	-	-	-	-	-	-	-


Weld-on Lip Shrouds



WSCE50 



WSCE70 

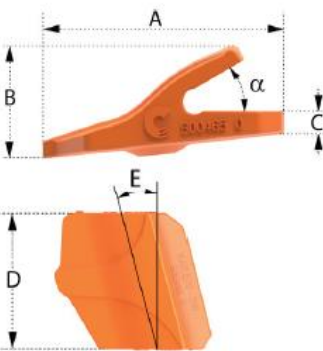


WSLE70 




WSRE70 

Typ	Art.Nr.	passend zu	Dicke mm	Gewicht kg	A mm	B mm	C mm	D mm	E mm	α °
WSCE50	500461		40-50	8	225	85	20	150	0	30
WSCE70	500464		60-70	18.5	255	120	25	250	0	30
WSLE70	500465		60-70	18.9	255	120	25	250	15	30
WSRE70	500466		60-70	18.9	255	120	25	250	15	30

Shrouds













SSM SIDE SHROUD 



WHS HEEL SHROUD 



PIN AND RING 

Typ	Art.Nr.	passend zu	Dicke mm	Gewicht kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm
SSM*1	700602		50.0	28.6	500	189	98	52	190	64	23	53
SSM*2	700601		63.5	40.2	564	215	115	65	220	75	27	53
SSM*2	700603		60.0	41.2	564	215	115	63	220	75	27	53
Pin	700321		50.0	-	-	-	-	-	-	-	-	-
Pin	700320		60/63	-	-	-	-	-	-	-	-	-
Ring	700360		50.0	-	-	-	-	-	-	-	-	-
Ring	700361		60/63	-	-	-	-	-	-	-	-	-
WHS	700651		-	15.2	130	180	210	160	-	-	-	-
WHS	700652		-	20.0	150	180	240	180	-	-	-	-
WHS	700653		-	37.0	199	250	300	236	-	-	-	-