




Standard Tieflöffel



Typ	Breite B mm	Inhalt Liter / SAE	Zähne Z Stk.	X mm	Y mm	T mm	Gewicht Kg
ST-50	300	80	3	700	600	520	93
	400	105	3				104
	500	135	4				121
	600	160	4				132
	700	190	4				143
	800	220	5				160
ST-100	300	100	3	850	750	560	100
	400	130	3				113
	500	160	4				130
	600	200	4				140
	700	230	4				153
	800	280	5				170
	900	320	5				180
ST-150	400	140	3	875	790	630	200
	500	185	3				218
	600	230	3				236
	750	300	4				268
	850	350	4				286
	1000	410	5				320
	1100	460	5				338
ST-200	400	180	3	950	870	645	219
	500	220	3				237
	600	290	3				257
	750	390	4				293
	850	450	4				313
	1000	550	5				350
	1200	680	5				385
ST-250	400	190	3	1030	925	740	310
	500	250	3				328
	600	350	3				350
	750	470	4				402
	850	570	4				423
	1000	650	5				475
	1100	730	5				497
	1200	820	5				519

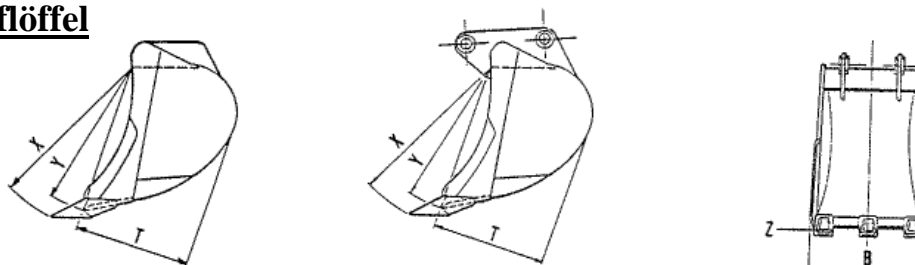

Typ	Breite B mm	Inhalt Liter / SAE	Zähne Z Stk.	X mm	Y mm	T mm	Gewicht Kg
ST-300	400	280	3	1130	1020	760	350
	500	320	3				362
	600	400	3				388
	700	450	4				445
	850	560	4				470
	1000	700	5				525
	1100	820	5				550
	1200	920	5				575
	1300	1000	6				620
	1350	1080	6				640
1400	1080	6	640				
ST-350	600	390	3	1200	1090	840	550
	750	500	3				565
	850	640	4				635
	1000	790	4				680
	1200	1000	5				765
	1300	1120	5				835
	1400	1200	5				875
1500	1280	6	905				
ST-400	600	480	3	1285	1180	860	590
	700	600	3				630
	850	780	4				703
	1000	950	4				753
	1200	1230	5				848
	1350	1320	6				923
	1400	1380	6				965
	1500	1550	7				997
ST-450	850	830	4	1520	1405	1210	950
	1000	1135	4				1090
	1200	1300	5				1230
	1350	1500	5				1320
	1500	1700	5				1420
	1600	1900	6				1500
ST-500	1000	1435	4	1750	1635	1310	1225
	1200	1770	5				1365
	1350	2045	5				1465
	1600	2500	6				1650

- Standardausführung:
- mit Combi Parts® Zähnen
 - Seitenwände mit Zusatzverstärkungen
 - Bodenbleche querverlaufend mit Verschleissblechen verstärkt
- Auf Wunsch lieferbar:
- Tieflöffel ohne Zähne, nur gerades Messer
 - Zahntyp nach Ihren Angaben
 - Weitere Löffelbreiten nach Ihren Angaben